




ORCHID SLIM35

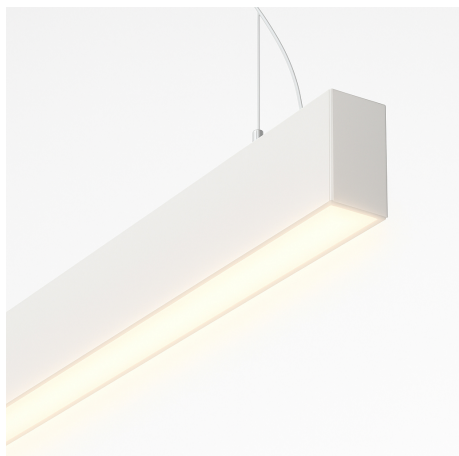

Surface-mounted luminaire ORCHID SLIM is made out of anodized aluminium profile. ORCHID SLIM luminaire is recommended for: office spaces, schools, universities, conference halls or public administration buildings etc.

Parameters:

Name	Luminaire luminous flux [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
ORCHID SLIM35 PLX	5747 / 4652 / 3522 / 2371	47.9 / 37.4 / 27.2 / 17.6	4000	1135 x 35 x 65
ORCHID SLIM35 MPRM	6202 / 5020 / 3800 / 2558	47.9 / 37.4 / 27.2 / 17.6	4000	1135 x 35 x 65
ORCHID SLIM35 UD PLX/MPRM	UP - 3201 / DOWN - 6202 / UP - 2618 / DOWN - 5019 / UP - 2004 / DOWN - 3800	80.9 / 63.3 / 46	4000	1135 x 35 x 65
ORCHID SLIM35 RASTER	4921 / 4243 / 3558 / 2864 / UP - 2315 / DOWN - 4921 / UP - 1687 / DOWN - 3558	37.1 / 31.4 / 26.1 / 20.6 / 59.5 / 50.3 / 41.7	4000	1085 x 35 x 65

Lighting and electrical parameters:

Light source	LED
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	90000
Lx/By	L70/B10
CRI	>80
SDCM	3
Photobiological risk class	RG0
Operating temperature range [°C]	5 ÷ 30
Driver	DALI driver

Mechanical data:

Material	aluminum
Color	white black *
Diffuser	PLX opalized

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025