

Description



Basic information

Family: **FUCHSIA**
Product: **FUCHSIA Z PLX ALU 840 126 3625**
Index: **BLS0000000145**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	12600
Power of luminaire [W]	120
Luminaire's light efficiency [lm/W]	105
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP40
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	50000
Lx/By	L80/B50
Operating temperature range [°C]	0 ÷ +40
Driver	LED driver

Mechanical parameters:

Assembly	pendant
Material	aluminum
Color	anodized aluminum
Diffuser	PLX opalized
Impact resistant	IK08
Weight [kg]	9.7
Dimensions [mm]	3625 x 51 x 102

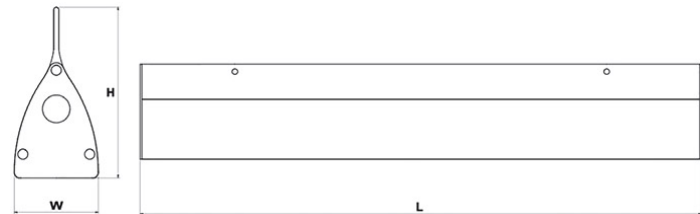

A graph of light

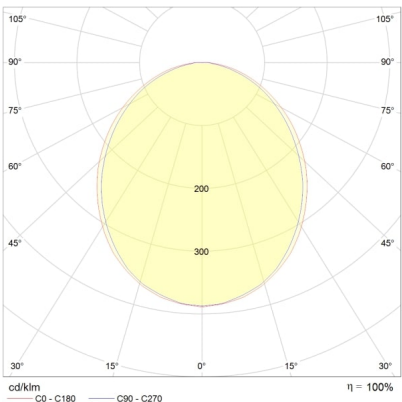

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 17-09-2025