

Description



Basic information

Family: FUCHSIA  
Product: FUCHSIA Z PLX ALU 840 84 1204  
Index: BLS0000000153  
Pictograms:




Lighting and electrical parameters


|                                           |                   |
|-------------------------------------------|-------------------|
| Light source                              | LED               |
| Luminaire luminous flux [lm]              | 8400              |
| Power of luminaire [W]                    | 80                |
| Luminaire's light efficiency [lm/W]       | 105               |
| Color of the light [K]                    | 4000              |
| CRI                                       | >80               |
| SDCM (LED sources)                        | 3                 |
| Photobiological risk class (IEC/EN 62471) | RG0               |
| Protection against electric shock         | I                 |
| Protection degree                         | IP40              |
| Voltage                                   | 220-240V, 50-60Hz |
| Lifetime of LED sources [h]               | 50000             |
| Lx/By                                     | L80/B50           |
| Operating temperature range [°C]          | 0 ÷ +40           |
| Driver                                    | LED driver        |

Mechanical parameters:

|                  |                   |
|------------------|-------------------|
| Assembly         | pendant           |
| Material         | aluminum          |
| Color            | anodized aluminum |
| Diffuser         | PLX opalized      |
| Impact resistant | IK08              |
| Weight [kg]      | 3.00              |
| Dimensions [mm]  | 1204 x 51 x 102   |

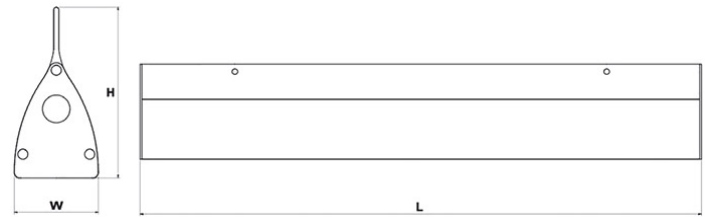

A graph of light

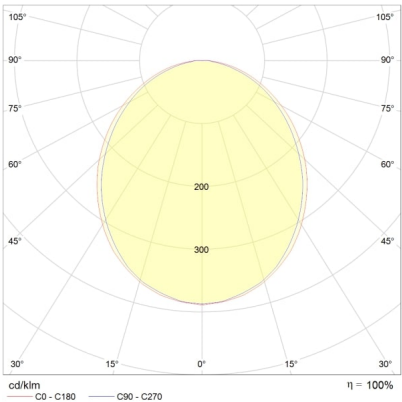

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 18-08-2025