


FREESIA HONEYCOMB



Description

Surface-mounted luminary FREESIA HONEYCOMB is equipped with the highly-efficient LED light sources. The body of the product is made from white powder-lacquered steel plate.

Basic information

Family: FREESIA HONEYCOMB  
Product: FREESIA HONEYCOMB N PLX IP44 CMW-2f-PR WH 830 30 284  
Index: BLS0000000275  
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	3013
Power of luminaire [W]	28
Luminaire's light efficiency [lm/W]	108
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	ceiling mounted
Material	aluminum
Color	white
Diffuser	PLX opalized
Impact resistant	IK04
Weight [kg]	1.60
Dimensions [mm]	284 x 325 x 85



A graph of light

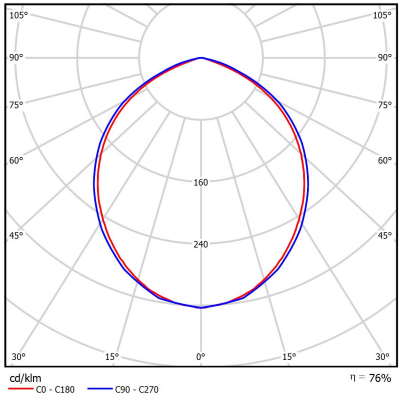

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 18-08-2025