

Description

Surface-mounted luminary FREESIA O is equipped with the highly-efficient LED light sources. The body of the product is made from white powder-lacquered steel plate.

Basic information

Family: FREESIA O  
Product: FREESIA O N-ML PLX IP44 CMW-2f-PR BL 830 30 D300 H65  
Index: BLS0000000297  
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	3013
Power of luminaire [W]	28
Luminaire's light efficiency [lm/W]	108
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	ceiling mounted with magnets
Material	aluminum
Color	black
Diffuser	PLX opalized
Impact resistant	IK04
Weight [kg]	1.6
Dimensions [mm]	ø300 x 65



A graph of light

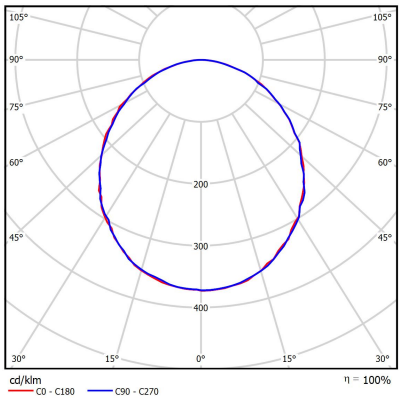

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 01-08-2025