



Description

Surface-mounted luminaire CROCUS is made out of white powder-lacquered steel plate. The polymethyl methacrylate luminary's shade is opalized.

Basic information

Family: CROCUS
Product: CROCUS N OPAL DALI 840 46 1255
Index: BLS0000000227
Pictograms:




Lighting and electrical parameters


Light source	LED DALI
Luminous flux LED [lm]	6100
LED power [W]	34
Luminaire luminous flux [lm]	4648
Power of luminaire [W]	36
Luminaire's light efficiency [lm/W]	129
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP20
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	DALI Driver

Mechanical parameters:

Assembly	ceiling mounted
Material	steel sheet
Color	white
Diffuser	PLX opalized
Impact resistant	IK04
Weight [kg]	2.9
Dimensions [mm]	1193 x 207 x 68



A graph of light

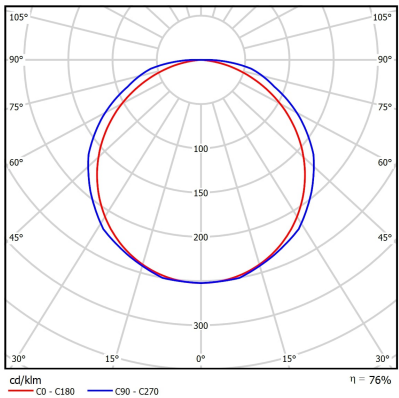

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024