



Description

Surface-mounted luminaire SNOWDROP N is made from white powder-lacquered steel plate. SNOWDROP N shines indirectly, its attuned light distribution („soft light“) which prevents from reflections to appear on the computer screens or other devices. This leads to an increase in the comfort of being in work stand rooms. SNOWDROP N luminaire is recommended for offices, conference halls, IT suits, schools, universities, any kind of public buildings etc.

Basic information

Family: SNOWDROP N
Product: SNOWDROP N MPRM WH 840 36 600
Index: BLS0000001133
Pictograms:




Lighting and electrical parameters

Light source	LED
Luminous flux LED [lm]	4484
LED power [W]	23
Luminaire luminous flux [lm]	3676
Power of luminaire [W]	25
Luminaire's light efficiency [lm/W]	147
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP20
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED Driver

Mechanical parameters:

Assembly	ceiling mounted
Material	steel sheet
Color	white
Diffuser	MPRM microprism
Impact resistant	IK04
Dimensions [mm]	600 x 610 x 70

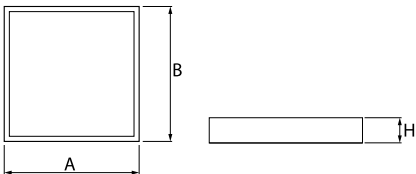

A graph of light

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 25-04-2024