



## Description

Surface-mounted luminaire SNOWDROP N is made from white powder-lacquered steel plate. SNOWDROP N shines indirectly, its attuned light distribution („soft light“) which prevents from reflections to appear on the computer screens or other devices. This leads to an increase in the comfort of being in work stand rooms. SNOWDROP N luminaire is recommended for offices, conference halls, IT suits, schools, universities, any kind of public buildings etc.

## Basic information

Family:	<b>SNOWDROP N</b>
Product:	<b>SNOWDROP N MPRM WH DALI 840 36 600</b>
Index:	<b>BLS0000001134</b>
Pictograms:	




## Lighting and electrical parameters

Light source	LED
<b>Luminous flux LED [lm]</b>	<b>4484</b>
LED power [W]	23
<b>Luminaire luminous flux [lm]</b>	<b>3676</b>
Power of luminaire [W]	25
<b>Luminaire's light efficiency [lm/W]</b>	<b>147</b>
Color of the light [K]	4000
<b>CRI</b>	<b>&gt;80</b>
SDCM (LED sources)	3
<b>Protection against electric shock</b>	<b>I</b>
Protection degree	IP20
<b>Voltage</b>	<b>220-240 V, 50-60 Hz</b>
Lifetime of LED sources [h]	150000
<b>Lx/By</b>	<b>L80/B50</b>
Operating temperature range [°C]	5 ÷ 30
<b>Driver</b>	<b>DALI Driver</b>

## Mechanical parameters:

Assembly	ceiling mounted
<b>Material</b>	<b>steel sheet</b>
Color	white
<b>Diffuser</b>	<b>MPRM microprism</b>
Impact resistant	IK04
<b>Dimensions [mm]</b>	<b>600 x 610 x 70</b>

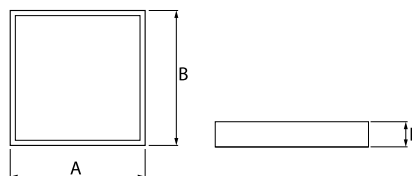

## A graph of light