



Description

Surface-mounted luminaire SNOWDROP N is made from white powder-lacquered steel plate. SNOWDROP N shines indirectly, its attuned light distribution („soft light“) which prevents from reflections to appear on the computer screens or other devices. This leads to an increase in the comfort of being in work stand rooms. SNOWDROP N luminaire is recommended for offices, conference halls, IT suits, schools, universities, any kind of public buildings etc.

Basic information

Family: SNOWDROP N
Product: SNOWDROP N MPRM WH 840 54 600
Index: BLS0000001136
Pictograms:




Lighting and electrical parameters

| | |
|-------------------------------------|---------------------|
| Light source | LED |
| Luminous flux LED [lm] | 6726 |
| LED power [W] | 34.5 |
| Luminaire luminous flux [lm] | 5460 |
| Power of luminaire [W] | 36.5 |
| Luminaire's light efficiency [lm/W] | 150 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Protection against electric shock | I |
| Protection degree | IP20 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 150000 |
| Lx/By | L80/B50 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | LED Driver |

Mechanical parameters:

| | |
|------------------|-----------------|
| Assembly | ceiling mounted |
| Material | steel sheet |
| Color | white |
| Diffuser | MPRM microprism |
| Impact resistant | IK04 |
| Dimensions [mm] | 600 x 610 x 70 |

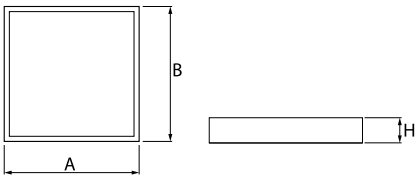

A graph of light

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 25-04-2024