




Description

Industrial luminaries ASTER GRP is a ceiling luminaire with highly-efficient LED light sources. It features high ingress protection (IP66). Product is made of polyester reinforced by fire-resistant glass fibre. Application of this material ensures resistance to thermal, mechanical and chemical influences. The material which ASTER GRP is made of and the way it is bonded ensures the resistance to chemical substances used for instance in the food industry.

Basic information

Family: **ASTER SPECIAL**
Product: **ASTER PRO GRP N OPAL IP66 840 39 1277**
Index: **BLS0000001137**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	3903
Power of luminaire [W]	23.8
Luminaire's light efficiency [lm/W]	164
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP66
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B10
Operating temperature range [°C]	-25 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	ceiling mounted
Color	gray
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	1277 x 117 x 100



A graph of light

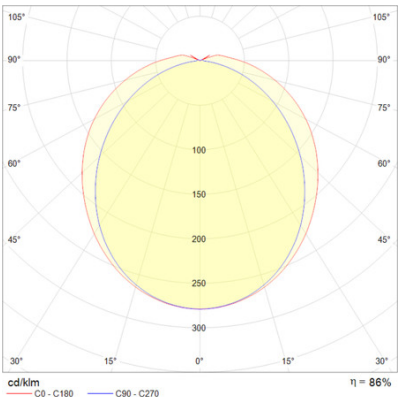

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025