



Description

Basic information

Family: **GLADIOLUS Z**  
Product: **GLADIOLUS Z PLX IP67 840 23 610**  
Index: **BLS0000001372**  
Pictograms:




Lighting and electrical parameters


|                                     |                     |
|-------------------------------------|---------------------|
| Light source                        | LED                 |
| Luminaire luminous flux [lm]        | 2300                |
| Power of luminaire [W]              | 20                  |
| Luminaire's light efficiency [lm/W] | 115                 |
| Color of the light [K]              | 4000                |
| CRI                                 | >80                 |
| SDCM (LED sources)                  | 3                   |
| Protection against electric shock   | I                   |
| Protection degree                   | IP67                |
| Voltage                             | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h]         | 60000               |
| Lx/By                               | L80/B50             |
| Operating temperature range [°C]    | -20 ÷ +50           |
| Driver                              | LED Driver          |

Mechanical parameters:

|                  |               |
|------------------|---------------|
| Assembly         | pendant       |
| Material         | polycarbonate |
| Diffuser         | PLX opalized  |
| Impact resistant | IK10          |
| Dimensions [mm]  | 610 x ø75     |

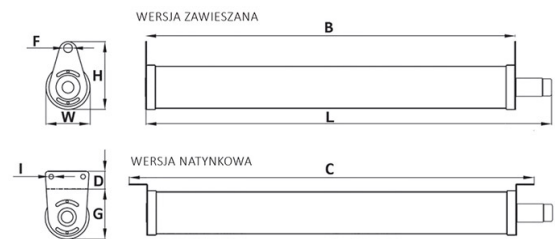

A graph of light

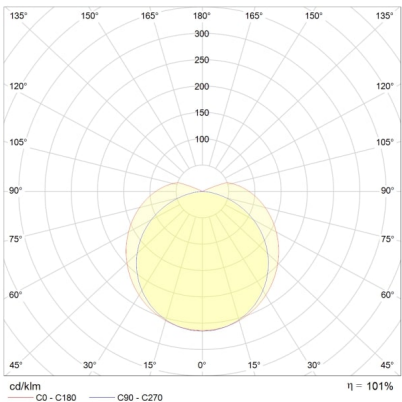

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 25-04-2024