

Description

Basic information

Family: **DAISYR**
Product: **DAISYR P MPRM WH IP20/44 840 40 595**
Index: **BLS0000001562**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	4065
Power of luminaire [W]	37.9
Luminaire's light efficiency [lm/W]	107
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	5
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20/44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	50000
Lx/By	L70/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED Driver

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	aluminium
Color	white
Diffuser	MPRM microprism
Impact resistant	IK04
Dimensions [mm]	595 x 595 x 25

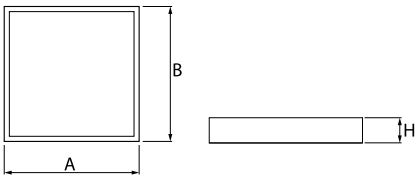


A graph of light

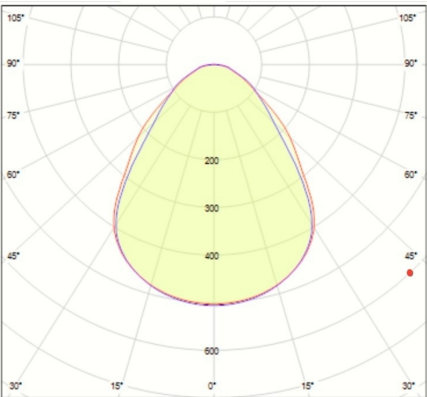


Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024

Accessories


Index	BLS0000004809
Name	Ramka nastradowa Daisy/DaisyR WH 605x605x65



Index	BLS0000004805
Name	Ramka nastradowa Daisy/DaisyR BL 605x605x65

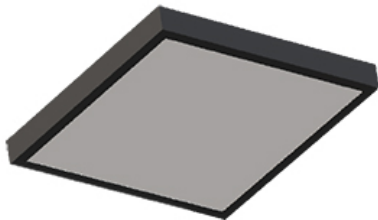

Index	BLS0000004806
Name	Ramka nastradowa Daisy/DaisyR GR 605x605x65



Index	BLS0000004807
Name	Ramka nastradowa Daisy/DaisyR ANT 605x605x65