




Description

Basic information

Family: **DAISYR**
Product: **DAISYR P PLX MW WH IP20/44 840 36-41-48 595**
Index: **BLS0000001563**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	4824 - 3641
Power of luminaire [W]	41,7 - 29,2
Luminaire's light efficiency [lm/W]	116 - 125
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	5
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20/44
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	70000
Lx/By	L70/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver
LED driver settings	41,7W - 4824 lm 33,3W - 4128 lm 29,2W - 3641 lm

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	aluminum
Color	white
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	595 x 595 x 25

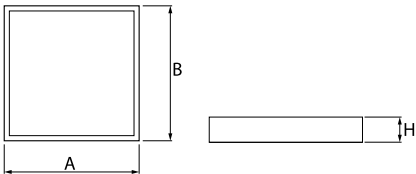

A graph of light

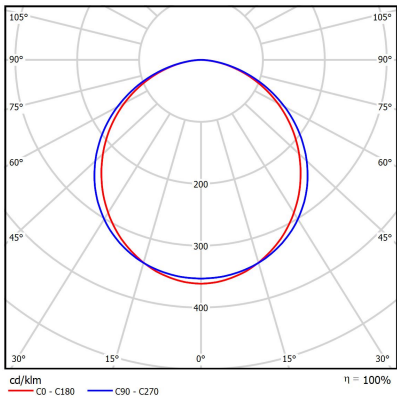

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025