



Description

Recessed luminaire LILY O P is made out of aluminium profile. LILY O P luminaires are recommended to interiors with professional characters, such as hotels, banks, offices etc.

Basic information

Family: LILY O P
Product: LILY O P WH IP20/65 830 12 D100
Index: BLS0000001578
Pictograms:



Lighting and electrical parameters


| | |
|---|---------------------|
| Light source | LED |
| Luminous flux LED [lm] | 1904 |
| LED power [W] | 12.3 |
| Luminaire luminous flux [lm] | 1415 |
| Power of luminaire [W] | 14 |
| Luminaire's light efficiency [lm/W] | 101 |
| Color of the light [K] | 3000 |
| CRI | >80 |
| SDCM (LED sources) | 2 |
| Beam angle [°] | 50 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | II |
| Protection degree | IP20/65 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | LED Driver |

Mechanical parameters:

| | |
|--------------------|--|
| Assembly | recessed into the modular and plasterboard ceiling |
| Material | aluminium |
| Color | white |
| Diffuser | ST transparent glass |
| Impact resistant | IK04 |
| Weight [kg] | 0.3 |
| Dimensions [mm] | Ø100 x 75 |
| Mounting hole [mm] | Ø85 |



A graph of light

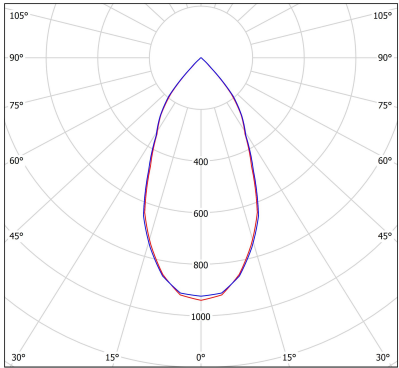

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024