Product card

RODA BASIC 1784

Description

Industrial luminary RODA BASIC 1784 FOSNOVA is made out of polycarbonate lacquered white. The diffuser is made from opalized PMMA. The colour temperature is 4000 K and colour rendering index CRI > 80. The luminary works in temperature fluctuating from -30 °C to +40 °C. Its ingress protection is IP65 and the protection against mechanical impacts is IK08. The product has increased durability and is recommended for production halls, magazines, warehouses and other industrial spaces that are much more demanding.

Basic information

Family: **RODA BASIC 1784**

Product: **RODA BASIC 1784 LED 18W CLD CELL GRIGIO**

Index: **BLS0000001523**

Pictograms:

Lighting and electrical parameters

Light source	LED
Luminaire luminous flux [lm]	**1800**
Power of luminaire [W]	18
Luminaire's light efficiency [lm/W]	**100**
Color of the light [K]	4000
CRI	**>80**
SDCM (LED sources)	3
Protection against electric shock	**II**
Protection degree	IP65
Voltage	**220-240 V, 50-60 Hz**
Lifetime of LED sources [h]	45000
Lx/By	**L70/B50**
Operating temperature range [°C]	-30 ÷ +40
Driver	**LED driver**

Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
Material	**aluminum**
Color	white
Diffuser	**PLX opalized**
Impact resistant	IK08
Dimensions [mm]	**633 x 68 x 55**



A graph of light

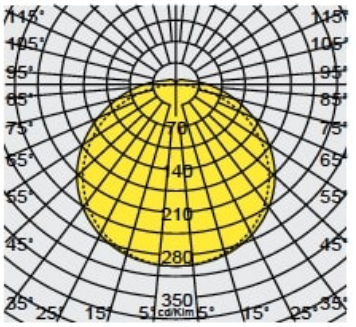

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 09-10-2025