


Description

Industrial surface mounted luminaire SNAPDRAGON is made out of steel plate which is white powder-lacquered (RAL 9016). Product is protected with a steel grid which is also powder-lacquered. SNAPDRAGON's diffuser eliminates in rooms to a considerable degree the glare phenomenon, which makes SNAPDRAGON perfect for schools, universities, gyms or sports halls.

Basic information

Family:	SNAPDRAGON
Product:	SNAPDRAGON N MPRM KR DALI WH 840 127 1200x220
Index:	BLS0000001531
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	13829
Power of luminaire [W]	96
Luminaire's light efficiency [lm/W]	144
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP20
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	DALI driver

Mechanical parameters:

Assembly	ceiling mounted
Material	steel sheet
Color	white
Diffuser	MPRM microprism
Impact resistant	IK10
Weight [kg]	5.65
Dimensions [mm]	1150 x 220 x 70

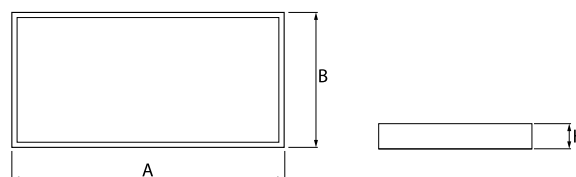

A graph of light

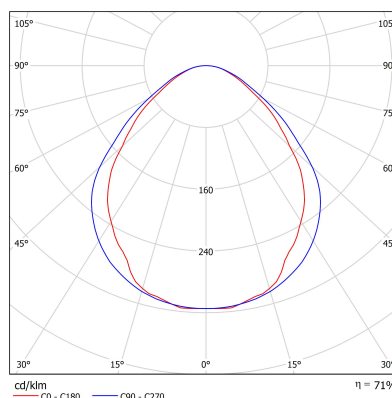

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025