



Description

Recessed luminaire LILY O P is made out of aluminium profile. LILY O P luminaires are recommended to interiors with professional characters, such as hotels, banks, offices etc.

Basic information

|             |                                     |
|-------------|-------------------------------------|
| Family:     | LILY SQ L2 P                        |
| Product:    | LILY SQ L2 P PLX DALI BL 840 25 268 |
| Index:      | BLS0000001654                       |
| Pictograms: |                                     |




Lighting and electrical parameters

|   |                     |
|---|---------------------|
| Light source                              | LED                 |
| Luminous flux LED [lm]                    | 3922                |
| LED power [W]                             | 24.6                |
| Luminaire luminous flux [lm]              | 3001                |
| Power of luminaire [W]                    | 27                  |
| Luminaire's light efficiency [lm/W]       | 111                 |
| Color of the light [K]                    | 4000                |
| CRI                                       | >80                 |
| SDCM (LED sources)                        | 2                   |
| Photobiological risk class (IEC/EN 62471) | RG0                 |
| Protection against electric shock         | I                   |
| Protection degree                         | IP20                |
| Voltage                                   | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h]               | 100000              |
| Lx/By                                     | L80/B10             |
| Operating temperature range [°C]          | 5 ÷ 30              |
| Driver                                    | DALI Driver         |

Mechanical parameters:

|                    |  |
|--------------------|--|
| Assembly           | recessed into the modular and plasterboard ceiling |
| Material           | aluminium  |
| Color              | black  |
| Diffuser           | PLX opalized                                       |
| Impact resistant   | IK04   |
| Dimensions [mm]    | 268 x 165  |
| Mounting hole [mm] | 253 x 150  |

A graph of light

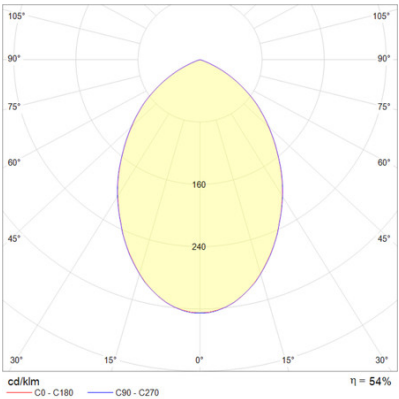

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 25-04-2024