



Description

Recessed luminaire LILY O P is made out of aluminium profile. LILY O P luminaires are recommended to interiors with professional characters, such as hotels, banks, offices etc.

Basic information

| | |
|-------------|--------------------------------------|
| Family: | LILY SQ L2 P |
| Product: | LILY SQ L2 P MPRM DALI BL 830 27 385 |
| Index: | BLS0000001670 |
| Pictograms: | |




Lighting and electrical parameters

| | |
|---|---------------------|
| Light source | LED |
| Luminous flux LED [lm] | 3808 |
| LED power [W] | 24.6 |
| Luminaire luminous flux [lm] | 2958 |
| Power of luminaire [W] | 27 |
| Luminaire's light efficiency [lm/W] | 110 |
| Color of the light [K] | 3000 |
| CRI | >80 |
| SDCM (LED sources) | 2 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | I |
| Protection degree | IP20 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | DALI Driver |

Mechanical parameters:

| | |
|--------------------|--|
| Assembly | recessed into the modular and plasterboard ceiling |
| Material | aluminium |
| Color | black |
| Diffuser | MPRM microprism |
| Impact resistant | IK04 |
| Dimensions [mm] | 385 x 215 |
| Mounting hole [mm] | 370 x 200 |

A graph of light

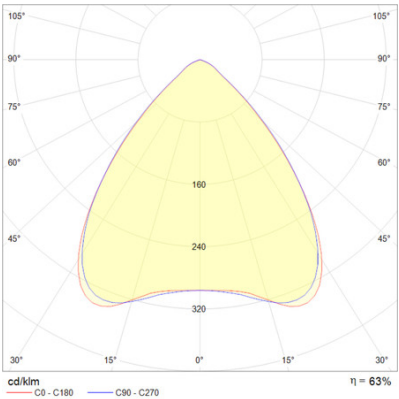

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 25-04-2024