



Description

Recessed luminaire LILY O P is made out of aluminium profile. LILY O P luminaires are recommended to interiors with professional characters, such as hotels, banks, offices etc.

Basic information

Family:	LILY SQ L2 P
Product:	LILY SQ L2 P MPRM DALI WH 830 27 385
Index:	BLS000000167 4
Pictograms:	




Lighting and electrical parameters

Light source	LED
Luminous flux LED [lm]	3808
LED power [W]	24.6
Luminaire luminous flux [lm]	2958
Power of luminaire [W]	27
Luminaire's light efficiency [lm/W]	110
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	2
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP20
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DALI Driver

Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
Material	aluminium
Color	white
Diffuser	MPRM microprism
Impact resistant	IK04
Dimensions [mm]	385 x 215
Mounting hole [mm]	370 x 200

A graph of light

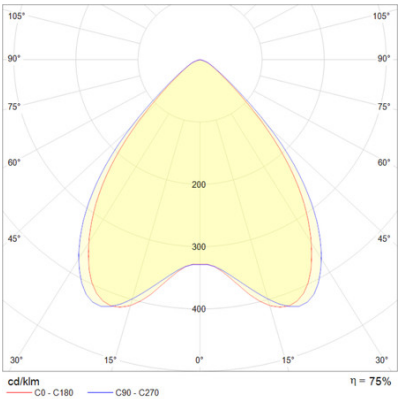

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 25-04-2024