



Description

Recessed luminaire LILY O P is made out of aluminium profile. LILY O P luminaires are recommended to interiors with professional characters, such as hotels, banks, offices etc.

Basic information

Family: LILY SQ L2 P  
Product: LILY SQ L2 P DALI WH 830 63 385  
Index: BLS0000001693  
Pictograms:




Lighting and electrical parameters

|   |                     |
|---|---------------------|
| Light source                              | LED                 |
| Luminous flux LED [lm]                    | 7644                |
| LED power [W]                             | 48.4                |
| Luminaire luminous flux [lm]              | 6536                |
| Power of luminaire [W]                    | 53                  |
| Luminaire's light efficiency [lm/W]       | 123                 |
| Color of the light [K]                    | 3000                |
| CRI                                       | >80                 |
| SDCM (LED sources)                        | 2                   |
| Photobiological risk class (IEC/EN 62471) | RG0                 |
| Protection against electric shock         | I                   |
| Protection degree                         | IP20                |
| Voltage                                   | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h]               | 100000              |
| Lx/By                                     | L80/B10             |
| Operating temperature range [°C]          | 5 ÷ 30              |
| Driver                                    | DALI Driver         |

Mechanical parameters:

|                    |  |
|--------------------|--|
| Assembly           | recessed into the modular and plasterboard ceiling |
| Material           | aluminium  |
| Color              | white  |
| Diffuser           | ST transparent glass                               |
| Impact resistant   | IK04   |
| Dimensions [mm]    | 385 x 215  |
| Mounting hole [mm] | 370 x 200  |

A graph of light

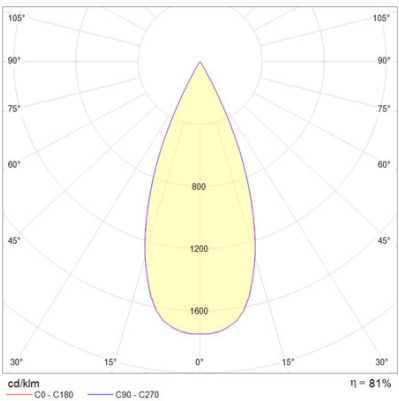

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 25-04-2024