



## Description

Recessed luminaire LILY O P is made out of aluminium profile. LILY O P luminaires are recommended to interiors with professional characters, such as hotels, banks, offices etc.

## Basic information

|             |                                             |
|-------------|---------------------------------------------|
| Family:     | <b>LILY SQ adj P</b>                        |
| Product:    | <b>LILY SQ adj P PLX DALI BL 830 12 100</b> |
| Index:      | <b>BLS0000001699</b>                        |
| Pictograms: |                                             |




## Lighting and electrical parameters


|                                                  |                     |
|--------------------------------------------------|---------------------|
| Light source                                     | LED                 |
| <b>Luminaire luminous flux [lm]</b>              | <b>1324</b>         |
| Power of luminaire [W]                           | 14                  |
| <b>Luminaire's light efficiency [lm/W]</b>       | <b>95</b>           |
| Color of the light [K]                           | 3000                |
| <b>CRI</b>                                       | <b>&gt;80</b>       |
| SDCM (LED sources)                               | 2                   |
| <b>Photobiological risk class (IEC/EN 62471)</b> | <b>RG0</b>          |
| Protection against electric shock                | II                  |
| <b>Protection degree</b>                         | <b>IP20</b>         |
| Voltage                                          | 220-240 V, 50-60 Hz |
| <b>Lifetime of LED sources [h]</b>               | <b>100000</b>       |
| Lx/By                                            | L80/B10             |
| <b>Operating temperature range [°C]</b>          | <b>5 ÷ 30</b>       |
| Driver                                           | DALI driver         |

## Mechanical parameters:

|                        |                                                    |
|------------------------|----------------------------------------------------|
| Assembly               | recessed into the modular and plasterboard ceiling |
| <b>Material</b>        | <b>aluminum</b>                                    |
| Color                  | black                                              |
| <b>Diffuser</b>        | <b>PLX opalized</b>                                |
| Impact resistant       | IK05                                               |
| <b>Dimensions [mm]</b> | <b>100 x 100 x 90</b>                              |
| Mounting hole [mm]     | 85 x 85                                            |

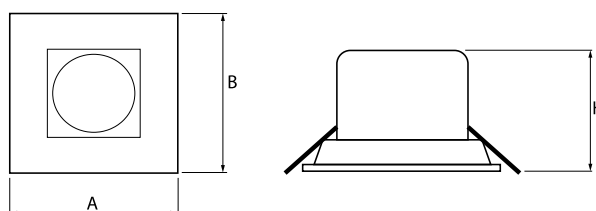

## A graph of light

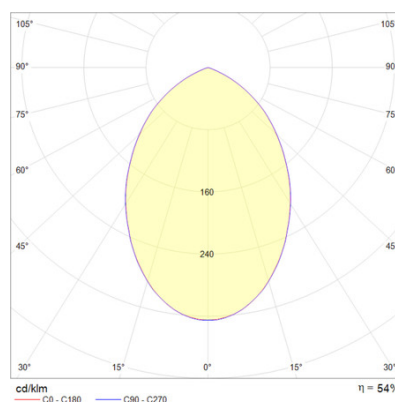

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 21-10-2025