



Description

Recessed luminaire LILY O P is made out of aluminium profile. LILY O P luminaires are recommended to interiors with professional characters, such as hotels, banks, offices etc.

Basic information

Family:	LILY SQ adj P
Product:	LILY SQ adj P MPRM DALI BL 830 13 100
Index:	BLS0000001715
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	1479
Power of luminaire [W]	14
Luminaire's light efficiency [lm/W]	106
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	2
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DALI driver

Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
Material	aluminum
Color	black
Diffuser	MPRM microprism
Impact resistant	IK05
Dimensions [mm]	100 x 100 x 90
Mounting hole [mm]	85 x 85

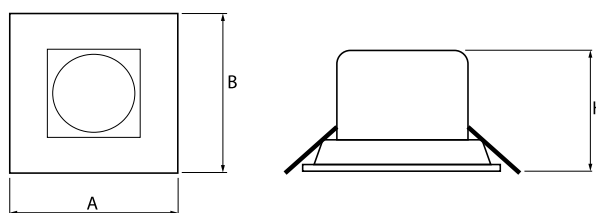

A graph of light

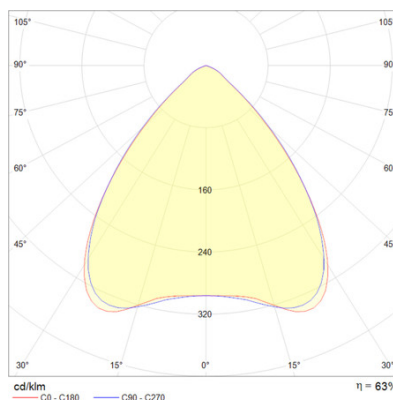

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 21-10-2025