



Description

Recessed luminaire TAGETES is a lighting luminaire can be installed in a dropped ceiling that is based on T24 grid and is equipped with the most modern highly-efficient LED lighting sources. TAGETES luminaire is made out of steel plate which is powder-lacquered white. The distinctive feature of TAGETES is its monolithic construction, which means that this luminaire can not disassemble during its exploitation. Two possibilities of the diffuser to choose: PLX or MPRM. TAGETES luminaire is recommended to light public buildings, such as universities, schools, offices, public administration buildings and other facilities.

Basic information

Family: TAGETES  
Product: TAGETES P MPRM DALI 840 56 596  
Index: BLS0000002084  
Pictograms:




Lighting and electrical parameters

Light source	LED
Luminous flux LED [lm]	6726
LED power [W]	34.5
Luminaire luminous flux [lm]	5642
Power of luminaire [W]	36.5
Luminaire's light efficiency [lm/W]	155
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP20/44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	DALI Driver

Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
Material	steel sheet
Color	white
Diffuser	MPRM microprism
Impact resistant	IK04
Dimensions [mm]	596 x 596 x 90

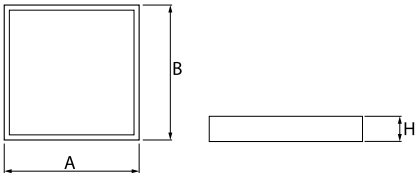

A graph of light

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 25-04-2024