


Description

Recessed luminaire TAGETES is a lighting luminaire can be installed in a dropped ceiling that is based on T24 grid and is equipped with the most modern highly-efficient LED lighting sources. TAGETES luminaire is made out of steel plate which is powder-lacquered white. The distinctive feature of TAGETES is its monolithic construction, which means that this luminaire can not disassemble during its exploitation. Two possibilities of the diffuser to choose: PLX or MPRM. TAGETES luminaire is recommended to light public buildings, such as universities, schools, offices, public administration buildings and other facilities.

Basic information

Family:	TAGETES
Product:	TAGETES P MPRM DALI 840 75 596
Index:	BLS0000002092
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	7523
Power of luminaire [W]	49
Luminaire's light efficiency [lm/W]	154
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP20/44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	DALI driver

Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
Material	steel sheet
Color	white
Diffuser	MPRM microprism
Impact resistant	IK04
Dimensions [mm]	596 x 596 x 90

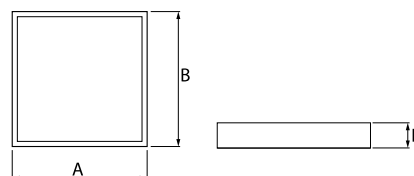

A graph of light

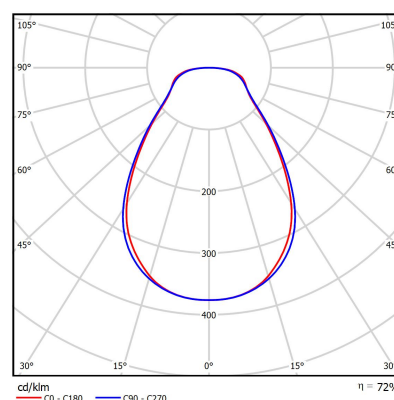

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 17-09-2025