



Description

Recessed luminaire LILY O P is made out of aluminium profile. LILY O P luminaires are recommended to interiors with professional characters, such as hotels, banks, offices etc.

Basic information

| | |
|-------------|--|
| Family: | LILY O P |
| Product: | LILY O P PLX DALI WH IP20/44 830 29 D165 |
| Index: | BLS0000002863 |
| Pictograms: | |




Lighting and electrical parameters


| | |
|---|---------------------|
| Light source | LED |
| Luminous flux LED [lm] | 3822 |
| LED power [W] | 24 |
| Luminaire luminous flux [lm] | 2925 |
| Power of luminaire [W] | 27 |
| Luminaire's light efficiency [lm/W] | 108 |
| Color of the light [K] | 3000 |
| CRI | >80 |
| SDCM (LED sources) | 2 |
| Beam angle [°] | 102 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | II |
| Protection degree | IP20/44 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | DALI Driver |

Mechanical parameters:

| | |
|--------------------|--|
| Assembly | recessed into the modular and plasterboard ceiling |
| Material | aluminium |
| Color | white |
| Diffuser | PLX opalized |
| Impact resistant | IK04 |
| Weight [kg] | 0.95 |
| Dimensions [mm] | Ø165 x 100 |
| Mounting hole [mm] | Ø140 |

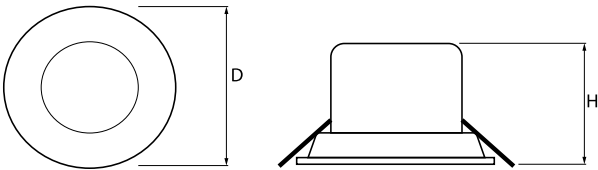

A graph of light

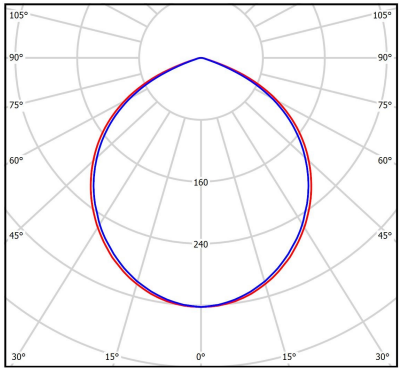

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024