



# HONEY HONEYCOMB

## Description

Modern architectural luminaire HONEYCOMB (hexagon) features an original pattern of the simple form. HONEY COMB luminaire is designed to interiors that require demanding architectural solutions. The shape of this luminaire is modelled on actual honeycomb cell (hexagon with curved finishes). It is perfect for hotel atriums, office receptions, architectural ateliers, conference rooms, corridors, halls in exclusive buildings and also cinemas, theatres or new-style shops in shopping centres.

## Basic information

|             |  |
|-------------|--|
| Family:     | HONEY HONEYCOMB                              |
| Product:    | HONEY HONEYCOMB Z PLX WH 830 ZAW-1,5M 29 650 |
| Index:      | BLS0000002838                                |
| Pictograms: |  |




## Lighting and electrical parameters

|   |                     |
|---|---------------------|
| Light source                              | LED                 |
| Luminous flux LED [lm]                    | 5685                |
| LED power [W]                             | 46                  |
| Luminaire luminous flux [lm]              | 2994                |
| Power of luminaire [W]                    | 50                  |
| Luminaire's light efficiency [lm/W]       | 60                  |
| Color of the light [K]                    | 3000                |
| CRI                                       | >80                 |
| SDCM (LED sources)                        | 3                   |
| Photobiological risk class (IEC/EN 62471) | RG0                 |
| Protection against electric shock         | I                   |
| Protection degree                         | IP54                |
| Voltage                                   | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h]               | 60000               |
| Lx/By                                     | L80/B10             |
| Operating temperature range [°C]          | 5 ÷ 30              |
| Driver                                    | LED Driver          |

## Mechanical parameters:

|                  |                |
|------------------|----------------|
| Assembly         | pendant        |
| Material         | aluminium      |
| Color            | white          |
| Diffuser         | PLX opalized   |
| Impact resistant | IK04           |
| Dimensions [mm]  | 650 x 592 x 85 |

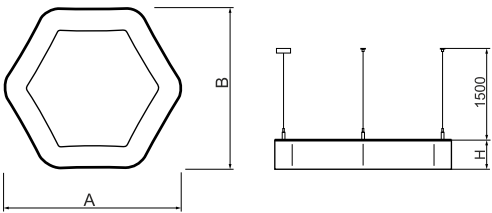

## A graph of light



Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 25-04-2024