




Description

Surface-mounted luminary ORCHID K is made out of anodized aluminium profile and can be alternatively adjusted to be installed on the wall. The luminary is recommended to bathrooms or corridors.

Basic information

Family:	ORCHID K
Product:	ORCHID K PLX IP44 DALI ALU 830 65 2255
Index:	BLS0000003127
Pictograms:	



Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	6532
Power of luminaire [W]	54.5
Luminaire's light efficiency [lm/W]	120
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	DALI driver

Mechanical parameters:

Assembly	wall-mounted
Material	aluminum
Color	anodized aluminum
Diffuser	PLX opalized
Impact resistant	IK06
Weight [kg]	3.65
Dimensions [mm]	2255 x 60 x 64



A graph of light

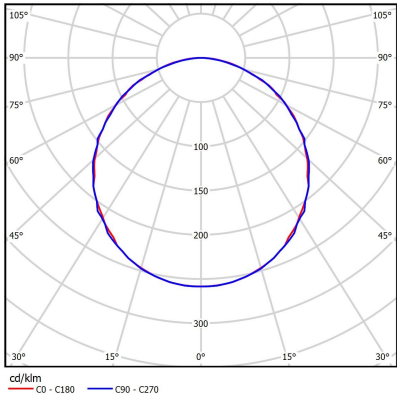

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 21-10-2025