



Description

Surface-mounted luminaire FREESIA SQ is made out of powder-lacquered steel plate. FREESIA SQ luminaire is recommended for offices, schools, universities, public administration buildings and other professional facilities.

Basic information

Family: **FREESIA SQ**
Product: **FREESIA SQ N PLX GR 840 73 595x595**
Index: **BLS0000003818**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	7366
Power of luminaire [W]	49
Luminaire's light efficiency [lm/W]	150
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP20
Voltage	220–240V, 50–60Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	ceiling mounted
Material	steel sheet
Color	gray
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	595 x 595 x 55

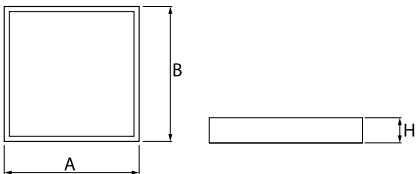

A graph of light

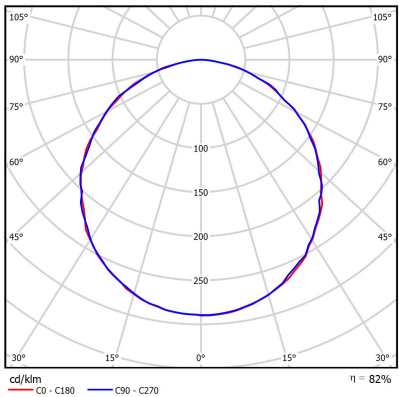

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025