


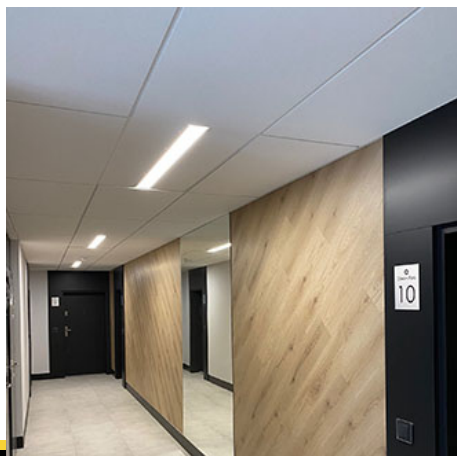

Description

Bee Art luminaire DAHLIA LINE is adjusted to be installed with a dropped ceiling or module ceiling 600x600 mm. DAHLIA LINE is made out of steel plate which is white-lacquered (RAL 9016) and has a shape of the line. Two possibilities of construction to choose from: module or segmental. This luminaire family has two modules, which make it possible to create lighting compositions in the module ceilings. Thanks to advanced lighting, with DAHLIA LINE you can design rooms and spaces with the division of particular zone.

Basic information

Family:	DAHLIA
Product:	DAHLIA LINE P PLX DALI WH 830 12 600
Index:	BLS0000004176
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	1263
Power of luminaire [W]	12.4
Luminaire's light efficiency [lm/W]	102
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP20/40
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DALI driver

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	steel sheet
Color	white
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	596 x 98 x 61



A graph of light

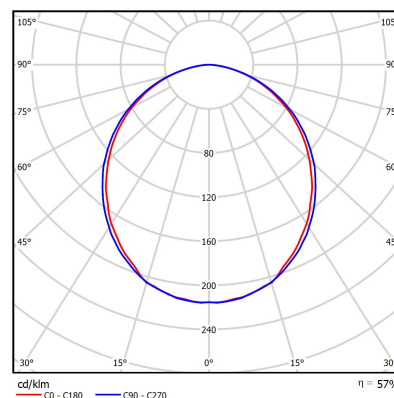

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025