




ORCHID OPT PZ

Description

Basic information

Family: **ORCHID OPT PZ**
Product: **ORCHID OPT PZ-1,5m RET ALU 830 20 1135**
Index: **BLS0000005454**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	2038
Power of luminaire [W]	13.2
Luminaire's light efficiency [lm/W]	154
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	pendant - slings required
Material	aluminum
Color	anodized aluminum
Diffuser	RET AIL linear lens
Impact resistant	IK06
Weight [kg]	2.3
Dimensions [mm]	1135 x 60 x 72



A graph of light

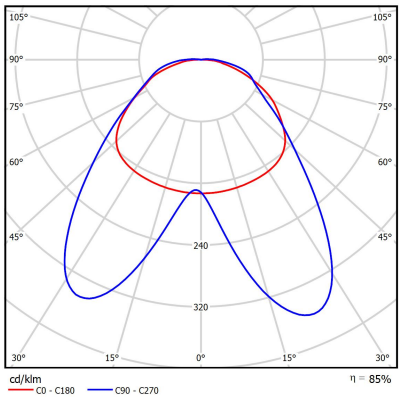

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 21-10-2025