



Description

CLEAN luminary ROSE is intended for module dropped ceilings and is made out of white-lacquered steel plate. Application: operating theatre, doctors' surgery, laboratory.

Basic information

| | |
|-------------|---|
| Family: | ROSE P CLIP-IN |
| Product: | ROSE P CLIP-IN MPRM DALI IP65 WH 940 85 600 |
| Index: | BLS0000005572 |
| Pictograms: | |




Lighting and electrical parameters


| | |
|--|----------------------------|
| Light source | LED |
| Luminous flux LED [lm] | 12005 |
| LED power [W] | 78 |
| Luminaire luminous flux [lm] | 9630 |
| Power of luminaire [W] | 83 |
| Luminaire's light efficiency [lm/W] | 116 |
| Color of the light [K] | 4000 |
| CRI | >90 |
| SDCM (LED sources) | 3 |
| Protection against electric shock | I |
| Protection degree | IP65 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 150000 |
| Lx/By | L70/B50 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | DALI Driver |

Mechanical parameters:

| | |
|------------------------|-------------------------------|
| Assembly | recessed into clip-in ceiling |
| Material | steel sheet |
| Color | white |
| Diffuser | MPRM microprism |
| Impact resistant | IK04 |
| Dimensions [mm] | 595 x 595 x 80 |



A graph of light

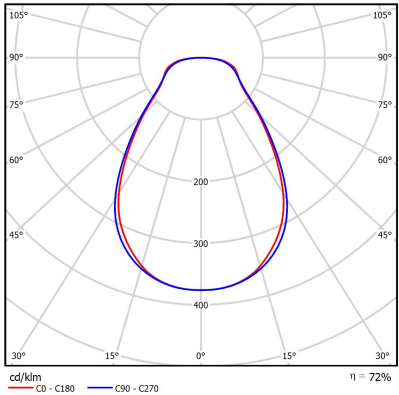

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024