



Description

Wall-mounted, decorative luminaire. Oblong tubular housing made of aluminum. The luminaire shines both up and down, illuminating the area near the wall and illuminating the entire room with the light reflected from the ceiling. Application: restaurants and cafes, representative receptions, lounges.

Basic information

Family: PEONY K  
Product: PEONY K UD WH 840 18 600  
Index: BLS0000005653  
Pictograms:




Lighting and electrical parameters


|                                     |            |
|-------------------------------------|------------|
| Luminaire luminous flux [lm]        | 1980       |
| Power of luminaire [W]              | 16         |
| Luminaire's light efficiency [lm/W] | 124        |
| Color of the light [K]              | 4000       |
| CRI                                 | >80        |
| SDCM (LED sources)                  | 2          |
| Protection against electric shock   | I          |
| Protection degree                   | IP20       |
| Voltage                             | 220-240V   |
| Lifetime of LED sources [h]         | 100000     |
| Lx/By                               | L80/B10    |
| Operating temperature range [°C]    | 5 ÷ 30     |
| Driver                              | LED driver |

Mechanical parameters:

|                  |              |
|------------------|--------------|
| Assembly         | wall-mounted |
| Material         | aluminum     |
| Color            | white        |
| Impact resistant | IK04         |
| Dimensions [mm]  | Ø40 x 600    |



A graph of light

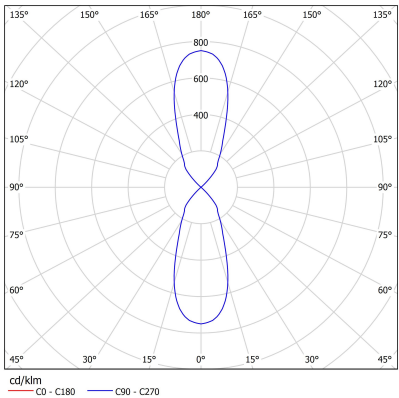

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 01-08-2025