




Description

Outdoor wide-beam LED floodlight. The luminaire is equipped with a motion sensor. The luminaire is intended for lighting car parks, outdoor areas and entrances in front of buildings.

Basic information

Family:	PUMPKIN
Product:	PUMPKIN CMW SH BL IP44 840 55 287
Index:	BLS0000005633
Pictograms:	




Lighting and electrical parameters

Light source	LED
Luminaire luminous flux [lm]	5853
Power of luminaire [W]	51
Luminaire's light efficiency [lm/W]	115
Color of the light [K]	4000
CRI	>80
Beam angle [°]	120
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	50000
Lx/By	L70/B50
Operating temperature range [°C]	- 20 ÷ +45
Driver	LED driver

Mechanical parameters:

Assembly	wall-mounted
Material	aluminum
Color	black
Diffuser	SH tempered glass
Weight [kg]	3.00
Dimensions [mm]	287 x 200 x 30

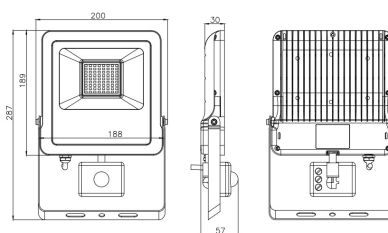

A graph of light

Accessories

Index	BLS0000015166
Name	Złącza IP68 - THB.391.A3A 3P



Index	BLS0000015166
Name	Złącza IP68 - THB.391.A3A 3P

