



FREESIA HONEYCOMB GK

Description

Recessed-mounted luminairesFREESIA HONEYCOMB is equipped with the highly-efficient LED light sources. The body of the product is made from white powder-lacquered steel plate.

Basic information

Family:	FREESIA HONEYCOMB GK
Product:	FREESIA HONEYCOMB GK PLX IP44 CMW-2f-PR WH 830 15 331
Index:	BLS0000005757
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	1519
Power of luminaire [W]	13
Luminaire's light efficiency [lm/W]	117
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP44
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	recessed into the plasterboard ceiling
Material	aluminum
Color	white
Diffuser	PLX opalized
Impact resistant	IK04
Weight [kg]	1.10
Dimensions [mm]	330 x 85
Mounting hole [mm]	310 x 330



A graph of light

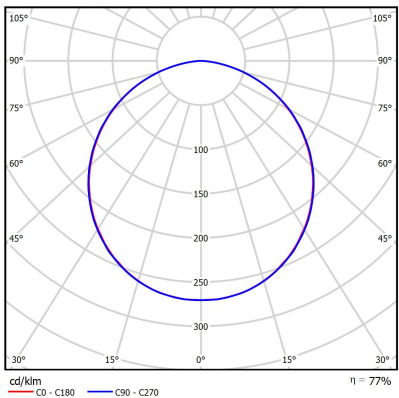

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025