



Description

CALLUNA SQ E27 luminaire features modern apperance. Right angles gives this luminaire a character, which is perfect for montage in new-style or classic spaces. Aluminium body and milky diffuser with symmetric light distribution. The luminaries are usually mounted along the paths in gardens/parks or next to the entrances to the properties.

Basic information

Family: CALLUNA SQ PLX
Product: CALLUNA SQ G PLX ANT IP44 840 16 1200
Index: BLS0000006030
Pictograms:



Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	1658
Power of luminaire [W]	20
Luminaire's light efficiency [lm/W]	83
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	- 30 ÷ +30
Driver	LED driver

Mechanical parameters:

Assembly	ground-mounted
Material	aluminum
Color	anthracite
Diffuser	PLX opalized
Weight [kg]	1.92
Dimensions [mm]	1200 x 120 x 120



A graph of light

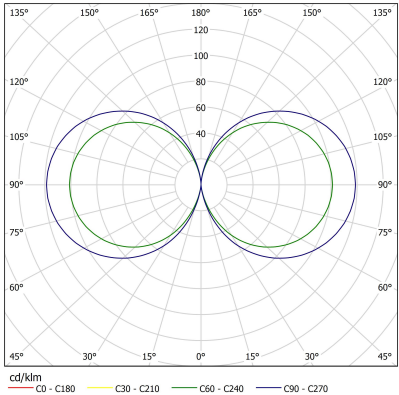

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025

Accessories

Index	BLS0000005918
Name	Fundament maly 15kg

