



Description

Wall-mounted, decorative luminaire. Oblong tubular housing made of aluminum. The luminaire shines down, illuminating the area near the wall. Application: restaurants and cafes, representative receptions, lounges.

Basic information

Family: PEONY K
Product: PEONY K DALI BL 840 18 800
Index: BLS0000006296
Pictograms:




Lighting and electrical parameters


| | |
|-------------------------------------|-------------|
| Luminaire luminous flux [lm] | 990 |
| Power of luminaire [W] | 8.5 |
| Luminaire's light efficiency [lm/W] | 116 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 2 |
| Protection against electric shock | I |
| Protection degree | IP20 |
| Voltage | 220-240V |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | DALI driver |

Mechanical parameters:

| | |
|------------------|--------------|
| Assembly | wall-mounted |
| Material | aluminum |
| Color | black |
| Impact resistant | IK04 |
| Dimensions [mm] | Ø40 x 800 |



A graph of light

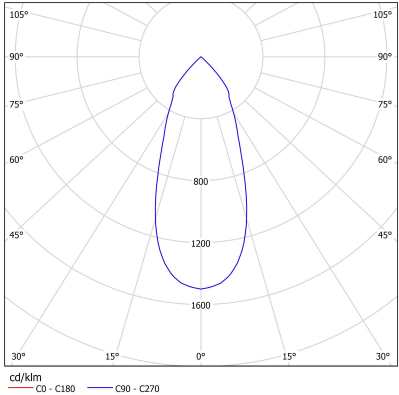

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 01-08-2025