



Description

Wall-mounted, decorative luminaire. Oblong tubular housing made of aluminum. The luminaire shines down, illuminating the area near the wall. Application: restaurants and cafes, representative receptions, lounges.

Basic information

|             |                             |
|-------------|-----------------------------|
| Family:     | PEONY K                     |
| Product:    | PEONY K DALI ANT 840 18 400 |
| Index:      | BLS0000006297               |
| Pictograms: |                             |




Lighting and electrical parameters


|                                     |             |
|-------------------------------------|-------------|
| Luminaire luminous flux [lm]        | 990         |
| Power of luminaire [W]              | 8.5         |
| Luminaire's light efficiency [lm/W] | 116         |
| Color of the light [K]              | 4000        |
| CRI                                 | >80         |
| SDCM (LED sources)                  | 2           |
| Protection against electric shock   | I           |
| Protection degree                   | IP20        |
| Voltage                             | 220-240V    |
| Lifetime of LED sources [h]         | 100000      |
| Lx/By                               | L80/B10     |
| Operating temperature range [°C]    | 5 ÷ 30      |
| Driver                              | DALI driver |

Mechanical parameters:

|                  |              |
|------------------|--------------|
| Assembly         | wall-mounted |
| Material         | aluminum     |
| Color            | anthracite   |
| Impact resistant | IK04         |
| Dimensions [mm]  | Ø40 x 400    |



A graph of light

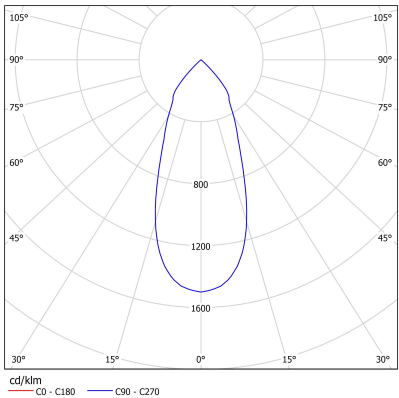

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 01-08-2025