




## Description

Architectural Bee Art luminaire LOBELIA is a lighting luminaire that is equipped with the highly-efficient LED lighting sources. LOBELIA is made out of aluminium profile. LOBELIA luminaires are perfect to highlight the character of representative places; that have to maintain their elegant form, such as: entry area, receptions, restaurants, corridors etc.

## Basic information

|             |                                                      |
|-------------|------------------------------------------------------|
| Family:     | <b>ORCHID PZ L</b>                                   |
| Product:    | <b>ORCHID PZ-1,5m L MPRM DALI ALU 840 20 600 600</b> |
| Index:      | <b>BLS0000006560</b>                                 |
| Pictograms: |                                                      |




## Lighting and electrical parameters


|                                                  |                   |
|--------------------------------------------------|-------------------|
| Light source                                     | LED               |
| <b>Luminaire luminous flux [lm]</b>              | <b>2030</b>       |
| Power of luminaire [W]                           | 13.2              |
| <b>Luminaire's light efficiency [lm/W]</b>       | <b>154</b>        |
| Color of the light [K]                           | 4000              |
| <b>CRI</b>                                       | <b>&gt;80</b>     |
| SDCM (LED sources)                               | 3                 |
| <b>Photobiological risk class (IEC/EN 62471)</b> | <b>RG0</b>        |
| Protection against electric shock                | I                 |
| <b>Protection degree</b>                         | <b>IP44</b>       |
| Voltage                                          | 220-240V, 50-60Hz |
| <b>Lifetime of LED sources [h]</b>               | <b>150000</b>     |
| Lx/By                                            | L80/B50           |
| <b>Operating temperature range [°C]</b>          | <b>5 ÷ 30</b>     |
| Driver                                           | DALI driver       |

## Mechanical parameters:

|                        |                           |
|------------------------|---------------------------|
| Assembly               | pendant – slings required |
| <b>Material</b>        | <b>aluminum</b>           |
| Color                  | anodized aluminum         |
| <b>Diffuser</b>        | <b>MPRM microprism</b>    |
| Impact resistant       | IK06                      |
| <b>Dimensions [mm]</b> | <b>598 598 x 60 x 72</b>  |



## A graph of light

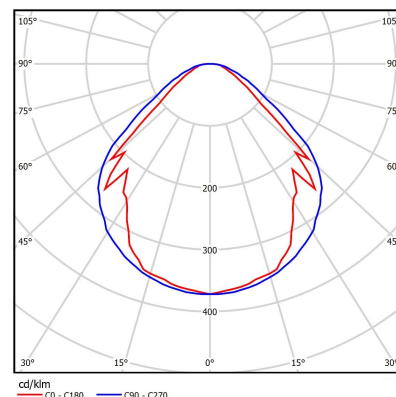

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025