

Description



Basic information

Family: **GLADIOLUS Z**
Product: **GLADIOLUS PRO Z PC-T IP67 840 77 1215**
Index: **BLS0000006849**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	7700
Power of luminaire [W]	44
Luminaire's light efficiency [lm/W]	175
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP67
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B50
Operating temperature range [°C]	-20 ÷ +50
Driver	LED Driver

Mechanical parameters:

Assembly	pendant
Material	polycarbonate
Diffuser	PC-T transparent polycarbonate
Impact resistant	IK10
Dimensions [mm]	1215 x ø75

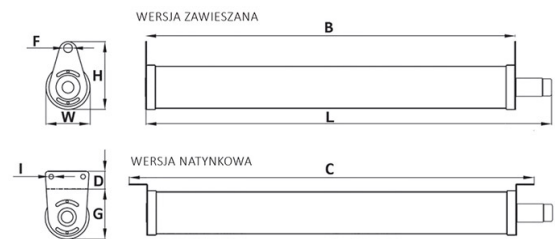

A graph of light

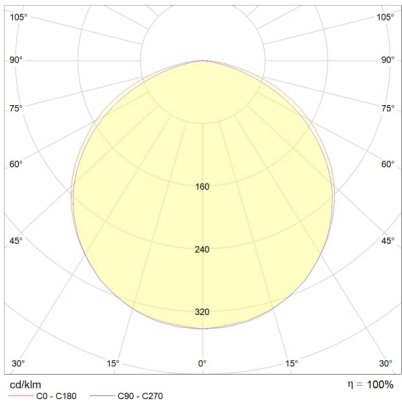

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024