



Description

HOYA luminary is built from rectangular aluminium profiles that are galvanized. Simple flat shape creates elegantly presenting architectural element. Used LED light sources in this luminary enables to realize majority of the projects. Application: paths in gardens/parks, entrances to the properties, public spaces.

Basic information

Family: **HOYA T**
 Product: **HOYA T G IP65 ANT 740 ST-S 2x75 3000x150x150**
 Index: **BLS0000006953**
 Pictograms:




Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	16310
LED power [W]	98
Luminaire luminous flux [lm]	15017
Power of luminaire [W]	112
Luminaire's light efficiency [lm/W]	134
Color of the light [K]	4000
CRI	>70
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP65
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	72000
Lx/By	L70/B10
Operating temperature range [°C]	-40 ÷ 50
Driver	LED Driver

● Mechanical parameters:

Assembly	ground
Material	aluminium
Color	anthracite
Diffuser	transparent glass lenses
Impact resistant	IK09
Dimensions [mm]	3000 x 150 x 150



● A graph of light

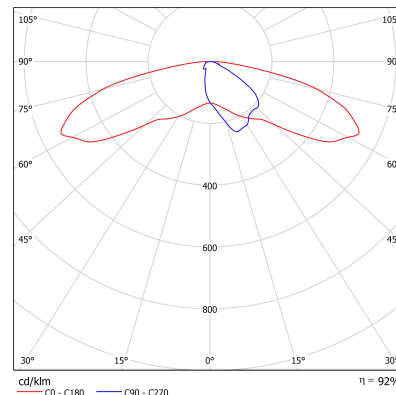

Technical data may be changed. Photos of the luminaires may differ from reality.


Date of last update: 25-04-2024

Accessories

Index	BLS0000005917
Name	Fundament B50



Index	BLS0000009083
Name	Izolacyjne złącze bezpiecznikowe IZK-4-01

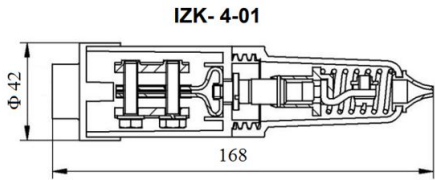

Index	BLS0000009053
Name	Komplet nakrętek montażowych słupa + kapturek maskujący czarnym - do B-50

