



Description

Basic information

Family: LILY SQ N  
Product: LILY SQ N MPRM WH 830 21 215  
Index: BLS0000007382  
Pictograms:




Lighting and electrical parameters


Light source	LED
<b>Luminous flux LED [lm]</b>	<b>2875</b>
LED power [W]	16.8
<b>Luminaire luminous flux [lm]</b>	<b>2306</b>
Power of luminaire [W]	20
<b>Luminaire's light efficiency [lm/W]</b>	<b>115</b>
Color of the light [K]	3000
<b>CRI</b>	<b>&gt;80</b>
SDCM (LED sources)	2
<b>Beam angle [°]</b>	<b>95</b>
Protection against electric shock	II
<b>Protection degree</b>	<b>IP20</b>
Voltage	220-240 V, 50-60 Hz
<b>Lifetime of LED sources [h]</b>	<b>100000</b>
Lx/By	L80/B10
<b>Operating temperature range [°C]</b>	<b>5 ÷ 30</b>
Driver	LED Driver

Mechanical parameters:

Assembly	ceiling mounted
<b>Material</b>	<b>steel sheet</b>
Color	white
<b>Diffuser</b>	<b>MPRM microprism</b>
Impact resistant	IK04
<b>Dimensions [mm]</b>	<b>215 x 215 x 132</b>



A graph of light

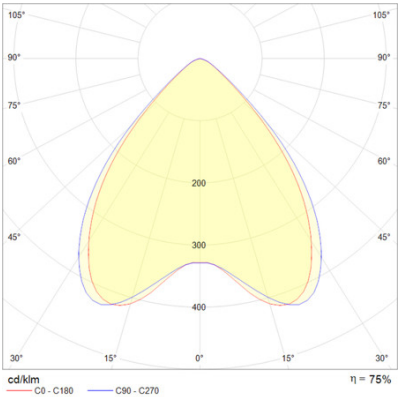

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 14-05-2024