



Description

Basic information

Family: LILY SQ adj N
Product: LILY SQ adj N MPRM DALI BL 830 13 165
Index: BLS0000007482
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	1904
LED power [W]	12.3
Luminaire luminous flux [lm]	1479
Power of luminaire [W]	14
Luminaire's light efficiency [lm/W]	106
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	2
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DALI Driver

Mechanical parameters:

Assembly	ceiling mounted
Material	aluminium
Color	black
Diffuser	MPRM microprism
Impact resistant	IK04
Dimensions [mm]	165 x 165 x 132



A graph of light

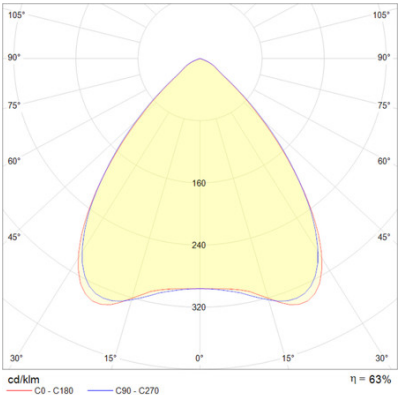

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024