



Description

Basic information

Family: LILY SQ adj N  
Product: LILY SQ adj N MPRM DALI BL 840 14 165  
Index: BLS0000007483  
Pictograms:




Lighting and electrical parameters


|                                           |                     |
|-------------------------------------------|---------------------|
| Light source                              | LED                 |
| Luminous flux LED [lm]                    | 1961                |
| LED power [W]                             | 12.3                |
| Luminaire luminous flux [lm]              | 1523                |
| Power of luminaire [W]                    | 14                  |
| Luminaire's light efficiency [lm/W]       | 109                 |
| Color of the light [K]                    | 4000                |
| CRI                                       | >80                 |
| SDCM (LED sources)                        | 2                   |
| Photobiological risk class (IEC/EN 62471) | RG0                 |
| Protection against electric shock         | II                  |
| Protection degree                         | IP20                |
| Voltage                                   | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h]               | 100000              |
| Lx/By                                     | L80/B10             |
| Operating temperature range [°C]          | 5 ÷ 30              |
| Driver                                    | DALI Driver         |

Mechanical parameters:

|                  |                 |
|------------------|-----------------|
| Assembly         | ceiling mounted |
| Material         | aluminium       |
| Color            | black           |
| Diffuser         | MPRM microprism |
| Impact resistant | IK04            |
| Dimensions [mm]  | 165 x 165 x 132 |



A graph of light

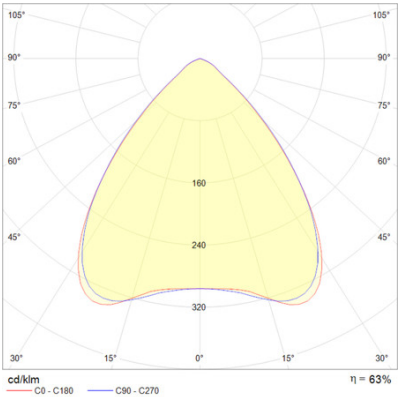

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 25-04-2024