



Description

Basic information

Family: LILY SQ adj N
Product: LILY SQ adj N PLX DALI BL 830 12 165
Index: BLS0000007498
Pictograms:




Lighting and electrical parameters


| | |
|---|---------------------|
| Light source | LED |
| Luminous flux LED [lm] | 1904 |
| LED power [W] | 12.3 |
| Luminaire luminous flux [lm] | 1324 |
| Power of luminaire [W] | 14 |
| Luminaire's light efficiency [lm/W] | 95 |
| Color of the light [K] | 3000 |
| CRI | >80 |
| SDCM (LED sources) | 2 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | II |
| Protection degree | IP20 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | DALI Driver |

Mechanical parameters:

| | |
|------------------|-----------------|
| Assembly | ceiling mounted |
| Material | aluminium |
| Color | black |
| Diffuser | PLX opalized |
| Impact resistant | IK04 |
| Dimensions [mm] | 165 x 165 x 132 |



A graph of light

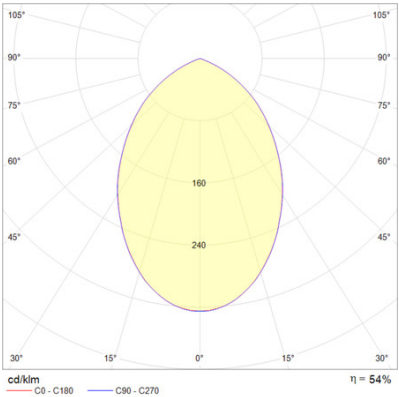

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024