



Description

Basic information

Family: ROSE MED CLIP-IN  
Product: ROSE MED PRO P CLIP-IN MPRM SH BIO DALI IP65 840 45 600  
Index: BLS0000007626  
Pictograms:




Lighting and electrical parameters


|                                            |                            |
|--------------------------------------------|----------------------------|
| Light source                               | LED                        |
| <b>Luminous flux LED [lm]</b>              | <b>6720</b>                |
| LED power [W]                              | 34.9                       |
| <b>Luminaire luminous flux [lm]</b>        | <b>4576</b>                |
| Power of luminaire [W]                     | 37                         |
| <b>Luminaire's light efficiency [lm/W]</b> | <b>124</b>                 |
| Color of the light [K]                     | 4000                       |
| <b>CRI</b>                                 | <b>&gt;80</b>              |
| SDCM (LED sources)                         | 3                          |
| <b>Protection against electric shock</b>   | <b>I</b>                   |
| Protection degree                          | IP65                       |
| <b>Voltage</b>                             | <b>220-240 V, 50-60 Hz</b> |
| Lifetime of LED sources [h]                | 150000                     |
| <b>Lx/By</b>                               | <b>L80/B10</b>             |
| Operating temperature range [°C]           | 5 ÷ 30                     |
| <b>Driver</b>                              | <b>DALI Driver</b>         |

Mechanical parameters:

|                        |                                              |
|------------------------|----------------------------------------------|
| Assembly               | recessed into clip-in ceiling                |
| <b>Material</b>        | <b>steel sheet + antibacterial paint</b>     |
| Color                  | white                                        |
| <b>Diffuser</b>        | <b>MPRM SH microprism tempered glass BIO</b> |
| Impact resistant       | IK08                                         |
| <b>Dimensions [mm]</b> | <b>595 x 595 x 80</b>                        |



A graph of light

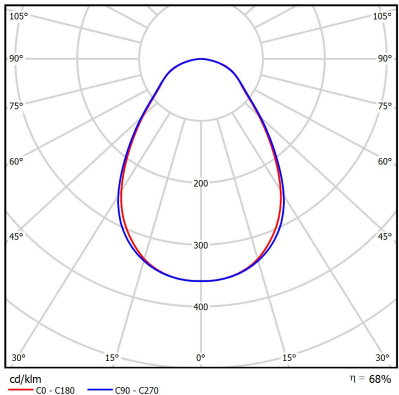

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 25-04-2024