



Description

Basic information

Family: ROSE MED CLIP-IN
Product: ROSE MED PRO P CLIP-IN MPRM SH BIO DALI IP65 840 76 600
Index: BLS0000007634
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	11200
LED power [W]	58.2
Luminaire luminous flux [lm]	7627
Power of luminaire [W]	60.3
Luminaire's light efficiency [lm/W]	126
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP65
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DALI Driver

Mechanical parameters:

Assembly	recessed into clip-in ceiling
Material	steel sheet + antibacterial paint
Color	white
Diffuser	MPRM SH microprism tempered glass BIO
Impact resistant	IK08
Dimensions [mm]	595 x 595 x 80



A graph of light

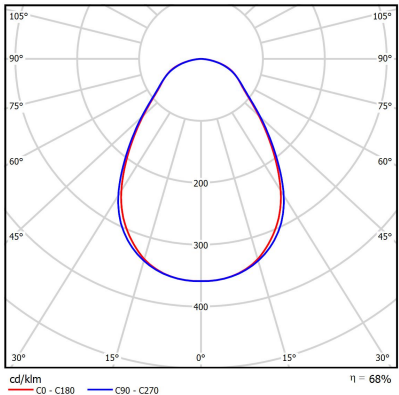

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024