



### Description

CLEAN luminaire ROSE is intended for module dropped ceilings and is made out of white-lacquered steel plate. Application: operating theatre, doctors' surgery, laboratory.

### Basic information

Family:	ROSE ISO CLIP-IN
Product:	ROSE P CLIP-IN ISO CRI MPRM SH IP65 940 48 600
Index:	BLS0000007873
Pictograms:	




### Lighting and electrical parameters


Light source	LED
<b>Luminous flux LED [lm]</b>	<b>7203</b>
LED power [W]	46.8
<b>Luminaire luminous flux [lm]</b>	<b>5131</b>
Power of luminaire [W]	50
<b>Luminaire's light efficiency [lm/W]</b>	<b>103</b>
Color of the light [K]	4000
<b>CRI</b>	<b>&gt;90</b>
SDCM (LED sources)	3
<b>Protection against electric shock</b>	<b>I</b>
Protection degree	IP65
<b>Voltage</b>	<b>220-240 V, 50-60 Hz</b>
Lifetime of LED sources [h]	150000
<b>Lx/By</b>	<b>L70/B50</b>
Operating temperature range [°C]	5 ÷ 30
<b>Driver</b>	<b>LED Driver</b>

### Mechanical parameters:

Assembly	recessed into clip-in ceiling
<b>Material</b>	<b>steel sheet</b>
Color	white
<b>Diffuser</b>	<b>MPRM SH microprism tempered glass</b>
Impact resistant	IK08
<b>Dimensions [mm]</b>	<b>595 x 595 x 80</b>



### A graph of light

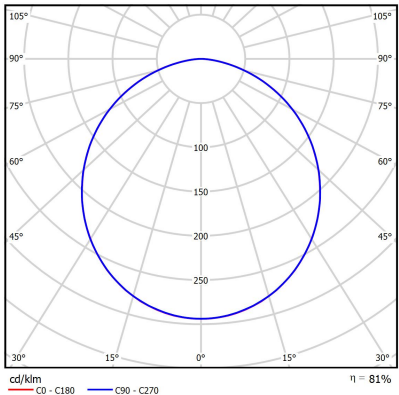

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 14-05-2024