



Description

Basic information

Family: ORCHID GK
Product: ORCHID GK MPRM ALU 830 26 855
Index: BLS0000007971
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	3193
LED power [W]	16.5
Luminaire luminous flux [lm]	2630
Power of luminaire [W]	20
Luminaire's light efficiency [lm/W]	132
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED Driver

Mechanical parameters:

Assembly	recessed into the plasterboard ceiling
Material	aluminium
Color	anodized aluminium
Diffuser	MPRM microprism
Impact resistant	IK06
Dimensions [mm]	862 x 80 x 72
Mounting hole [mm]	846 x 70



A graph of light

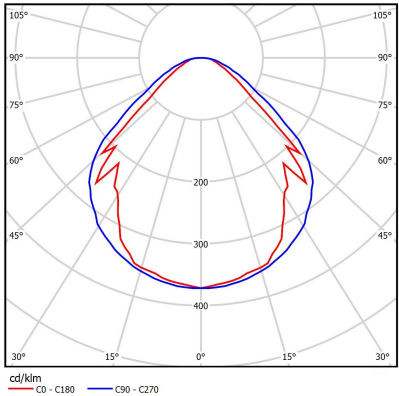

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024