



Description

Surface-mounted luminaire ORCHID is made out of anodized aluminium profile. ORCHID luminaire is recommended for: office spaces, schools, universities or public administration buildings etc.

Basic information

Family: **ORCHID PZ LINIA**
Product: **ORCHID PZ-1,5m MPRM ALU 840 LINIA-EP 27 850**
Index: **BLS0000008219**
Pictograms:




Lighting and electrical parameters

Light source	LED
Luminous flux LED [lm]	3363
LED power [W]	16.5
Luminaire luminous flux [lm]	2770
Power of luminaire [W]	20
Luminaire's light efficiency [lm/W]	139
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED Driver

Mechanical parameters:

Assembly	pendant - slings required
Material	aluminium
Color	anodized aluminium
Diffuser	MPRM microprism
Impact resistant	IK06
Dimensions [mm]	850 x 60 x 72



A graph of light



Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 25-04-2024

Accessories


Index	BLS0000004035
Name	ORCHID PZ SPINACZ OPRAW LINIA



Index	BLS0000003940
Name	Zawieszenie Typ 2 - Razeta SQ bez zasilania GR 1,5m



Index	BLS0000003999
Name	Zawieszenie Typ 1 - Razeta SQ pod zasilanie GR 1,5m

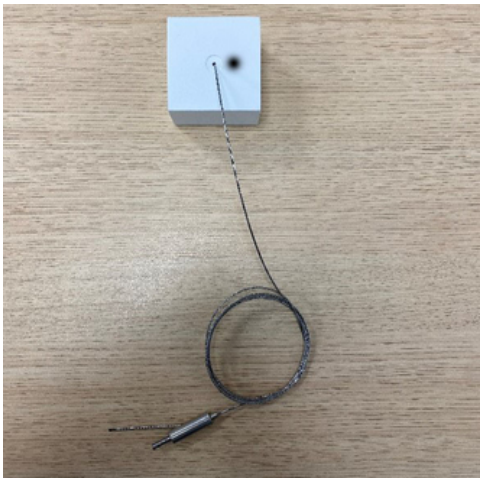

Index	BLS0000003959
Name	Zawieszenie Typ 6 - Prosty uchwyt sufitowy bez zasilania 1,5m

