

Description

Basic information

Family: CLOVE LRK GK  
Product: CLOVE LRK GK PLX 24V 14,4W/m 70 LED/m 840 12 1000  
Index: BLS0000008448  
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	1222
Power of luminaire [W]	16
Luminaire's light efficiency [lm/W]	76
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	III
Protection degree	IP20
Voltage	24VDC
Operating temperature range [°C]	5 ÷ 30
Driver	No driver

Mechanical parameters:

Assembly	recessed into the plasterboard ceiling
Material	aluminum
Color	anodized aluminum
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	1000 x 46,2 x 24,5

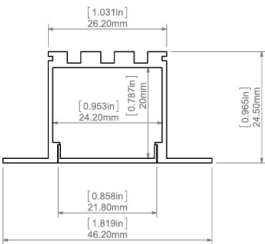

A graph of light

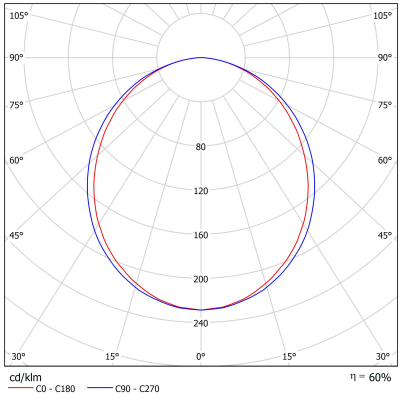

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 01-08-2025